

Features

- | | |
|--|--|
| <ul style="list-style-type: none"> • Single-Supply Operation from +1.8V ~ +5.5V • Rail-to-Rail Input / Output • Gain-Bandwidth Product: 350KHz (Typ. @25°C) • Low Input Bias Current: 20pA (Typ. @25°C) • Low Offset Voltage: 30uV (Max. @25°C) • Quiescent Current: 25µA per Amplifier (Typ.) • Operating Temperature: -45°C ~ +125°C | <ul style="list-style-type: none"> • Zero Drift: 0.03µV/°C (Max.) • Embedded RF Anti-EMI Filter • Small Package: <p>HM8333 Available in SOT23-5 and SC70-5 Packages</p> |
|--|--|

General Description

The HM8333 amplifier is single/dual supply, micro-power, zero-drift CMOS operational amplifiers, the amplifiers offer bandwidth of 350 kHz, rail-to-rail inputs and outputs, and single-supply operation from 1.8V to 5.5V. HM8333 uses chopper stabilized technique to provide very low offset voltage (less than 30 μ V maximum) and near zero drift over temperature. Low quiescent supply current of 25 μ A per amplifier and very low input bias current of 20pA make the devices an ideal choice for low offset, low power consumption and high impedance applications. The HM8333 offers excellent CMRR without the crossover associated with traditional complementary input stages. This design results in superior performance for driving analog-to-digital converters (ADCs) without degradation of differential linearity.

The HM8333 is available in SOT23-5 and SC70-5 packages. The extended temperature range of -45°C to +125°C over all supply voltages offers additional design flexibility.

Applications

- Transducer Application
- Temperature Measurements
- Electronics Scales
- Handheld Test Equipment
- Battery-Powered Instrumentation

Pin Configuration




Figure 1. Pin Assignment Diagram


| Condition | Min | Max |
|--|-----------------------|-----------------------|
| Power Supply Voltage (V _{DD} to V _{SS}) | -0.5V | +7.5V |
| Analog Input Voltage (IN+ or IN-) | V _{SS} -0.5V | V _{DD} +0.5V |
| PDB Input Voltage | V _{SS} -0.5V | +7V |
| Operating Temperature Range | -45°C | +125°C |
| Junction Temperature | +160°C | |
| Storage Temperature Range | -55°C | +150°C |
| Lead Temperature (soldering, 10sec) | +260°C | |
| Package Thermal Resistance (T_A=+25°C) | | |
| SOT23-5, θ _{JA} | 190°C/W | |
| ESD Susceptibility | | |
| HBM | 6KV | |
| MM | 400V | |


Package/Ordering Information

| MODEL | CHANNEL | ORDER NUMBER | PACKAGE DESCRIPTION | PACKAGE OPTION | MARKING INFORMATION |
|--------|---------|--------------|---------------------|--------------------|---------------------|
| HM8333 | Single | HM8333-MR | SOT23-5 | Tape and Reel,3000 | 333 |
| | | HM8333-UR | SC70-5 | Tape and Reel,3000 | 333 |

(At $V_s=5V$, $T_A = +25^{\circ}C$, $V_{CM} = V_S/2$, $R_L = 10K\Omega$, unless otherwise noted.)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--|-----|-------|-----|-------------------|
| INPUT CHARACTERISTICS | | | | | |
| Input Offset Voltage (V _{OS}) | | | ±2 | ±30 | μV |
| Input Bias Current (I _B) | | | 20 | | pA |
| Input Offset Current (I _{OS}) | | | 10 | | pA |
| Common-Mode Rejection Ratio (CMRR) | V _{CM} = 0V to 5V | | 110 | | dB |
| Large Signal Voltage Gain (A _{VO}) | R _L = 10kΩ, V _O = 0.3V to 4.7V | | 145 | | dB |
| Input Offset Voltage Drift (ΔV _{OS} /ΔT) | | | 50 | | nV/°C |
| OUTPUT CHARACTERISTICS | | | | | |
| Output Voltage High (V _{OH}) | R _L = 100kΩ to - V _S | | 4.998 | | V |
| | R _L = 10kΩ to - V _S | | 4.994 | | V |
| Output Voltage Low (V _{OL}) | R _L = 100kΩ to + V _S | | 5 | | mV |
| | R _L = 10kΩ to + V _S | | 20 | | mV |
| Short Circuit Limit (I _{SC}) | R _L =10Ω to - V _S | | 20 | | mA |
| Output Current (I _O) | | | 30 | | mA |
| POWER SUPPLY | | | | | |
| Power Supply Rejection Ratio (PSRR) | V _S = 2.5V to 5.5V | | 115 | | dB |
| Quiescent Current (I _Q) | V _O = 0V, R _L = 0Ω | | 25 | | μA |
| DYNAMIC PERFORMANCE | | | | | |
| Gain-Bandwidth Product (GBP) | G = +100 | | 350 | | KHz |
| Slew Rate (SR) | R _L = 10kΩ | | 0.2 | | V/μs |
| NOISE PERFORMANCE | | | | | |
| Voltage Noise (e _n p-p) | 0Hz to 10Hz | | 1.1 | | μV _{P-P} |
| Voltage Noise Density (e _n) | f = 1kHz | | 70 | | nV/√Hz |

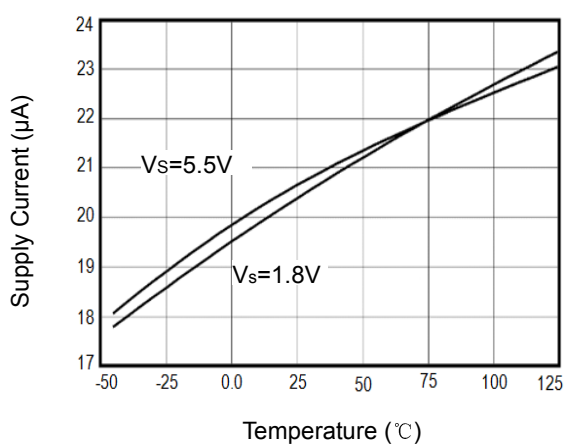

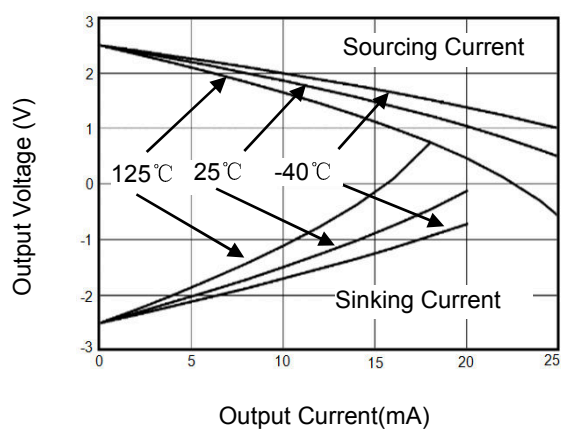

The diagram shows an operational amplifier configured as a voltage follower. The non-inverting input (+) is connected to the input voltage V_{IN} . The inverting input (-) is connected to the output node through a feedback capacitor C_F . The output node is also connected to a resistor R_F leading to ground. A resistor R_{ISO} is connected between the output node and a load network. The load network consists of a capacitor C_L and a resistor R_L connected in parallel to ground. The output voltage is labeled V_{OUT} .

Figure 3. Indirectly Driving a Capacitive Load with DC Accuracy

Typical Application Circuits

Differential amplifier

The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common to the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Figure 4. shown the differential amplifier using HM8333.

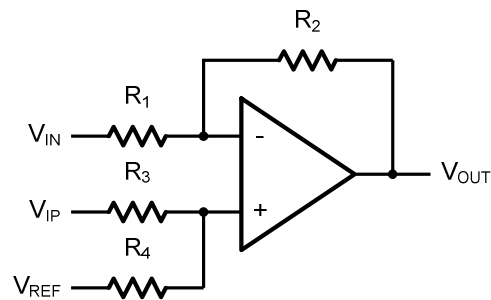


Figure 4. Differential Amplifier

$$V_{OUT} = \left(\frac{R_1+R_2}{R_3+R_4}\right) \frac{R_4}{R_1} V_{IN} - \frac{R_2}{R_1} V_{IP} + \left(\frac{R_1+R_2}{R_3+R_4}\right) \frac{R_3}{R_1} V_{REF}$$

If the resistor ratios are equal (i.e. $R_1=R_3$ and $R_2=R_4$), then

$$V_{OUT} = \frac{R_2}{R_1}(V_{IP} - V_{IN}) + V_{REF}$$

Low Pass Active Filter

The low pass active filter is shown in Figure 5. The DC gain is defined by $-R_2/R_1$. The filter has a -20dB/decade roll-off after its corner frequency $f_C=1/(2\pi R_3 C_1)$.


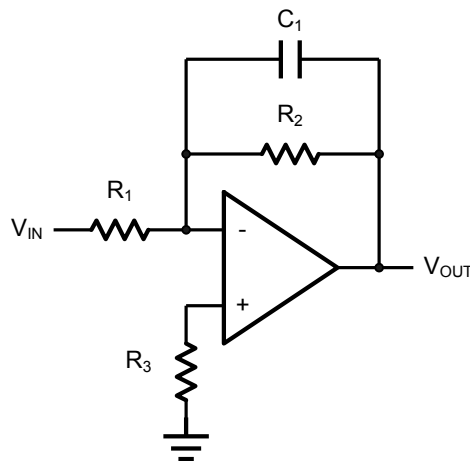


Figure 5. Low Pass Active Filter

The triple HM8333 can be used to build a three-op-amp instrumentation amplifier as shown in Figure 6. The amplifier in Figure 6 is a high input impedance differential amplifier with gain of R_2/R_1 . The two differential voltage followers assure the high input impedance of the amplifier.



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950 BSC | | 0.037 BSC | |
| e1 | 1.900 BSC | | 0.075 BSC | |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | Min | Max | Min | Max |
| A | 0.900 | 1.100 | 0.035 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.000 | 0.035 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| C | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.650TYP | | 0.026TYP | |
| e1 | 1.200 | 1.400 | 0.047 | 0.055 |
| L | 0.525REF | | 0.021REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |