


1. 概述

HM2538 為單晶片 CMOS 的兩通道雙向馬達驅動IC，利用大型積體電路(LSI)製造技術，具有低電源及低成本的特性，可應用於低電壓工作模式。電路採用H橋架構，內置功率 MOSFET 開關，可實現對直流電機做 正轉、反轉、煞車、停止 四個功能的控制。通道1和通道2的持續輸出電流為1.5A，最大峰值輸出電流可到2.5A。

2. 功能

- (1). 寬廣的工作電壓： 1.8V ~ 9.6V 。
- (2). 內置 PMOS/NMOS 功率開關的 H 橋驅動器。
- (3). 支援4種操作模式：正轉 / 反轉 / 制動 / 停止。
- (4). 低待機電流 (Typ.=0.1uA)。
- (5). 通道1和通道2達到1.5A 以上電流輸出能力。
- (6). 內建過溫保護功能 。(TSD, Thermal Shutdown)
- (7). CMOS 輸入，輸入腳內建下拉電阻，無需外加限流電阻。
- (8). 高達 5KV 的人體靜電模式 (HBM) 的 ESD 保護。
- (9). 提供ESOP-16 封裝。

16-pin ESOP-16

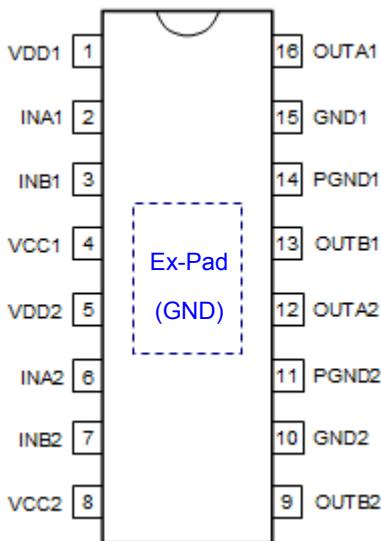

[]: 外部焊點。

連接到PCB的接地散熱片以利散熱。


1. GENERAL DESCRIPTION

HM2538 is a single-chip dual channel bi-directional motor driver CMOS IC for low-voltage applications. It is designed by LSI high technology with a low-power and low-cost process. It has H bridge driver of built-in MOSFET power switch to provide Forward / Reverse / Brake / Stop function for motor driver applications. Both Channel 1 and Channel 2 have the same continuous current 1.5A with peak current 2.5A output capability.

2. FEATURES

- (1). Wide operating voltage: 1.8V ~ 9.6V.
- (2). H bridge driver of internal PMOS/NMOS power switches.
- (3). Support 4 operating mode: Forward / Backward / Brake / Stop.
- (4). Low standby current. (Typ.=0.1uA)
- (5). Both Channel 1 and Channel 2 have over 1.5A output current capability.
- (6). Built-in Thermal Shutdown (TSD) circuit.
- (7). CMOS input. Built-in input pull-low resistance and no current-limit resistance required.
- (8). High 5KV Human Body Mode (HBM) ESD protection.
- (9). ESOP-16 package type is available.


16-pin ESOP-16

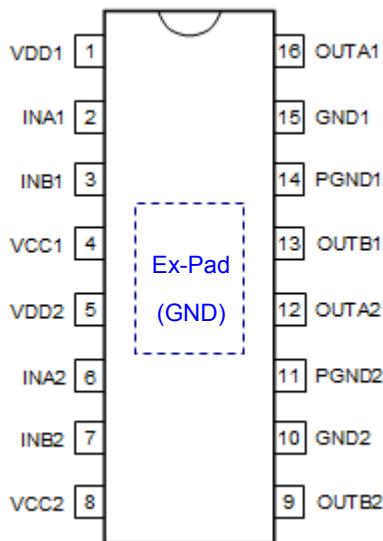

[] : Exposed Pad.

Connect to PCB ground plane for heat dissipation.

3. BLOCK DIAGRAM

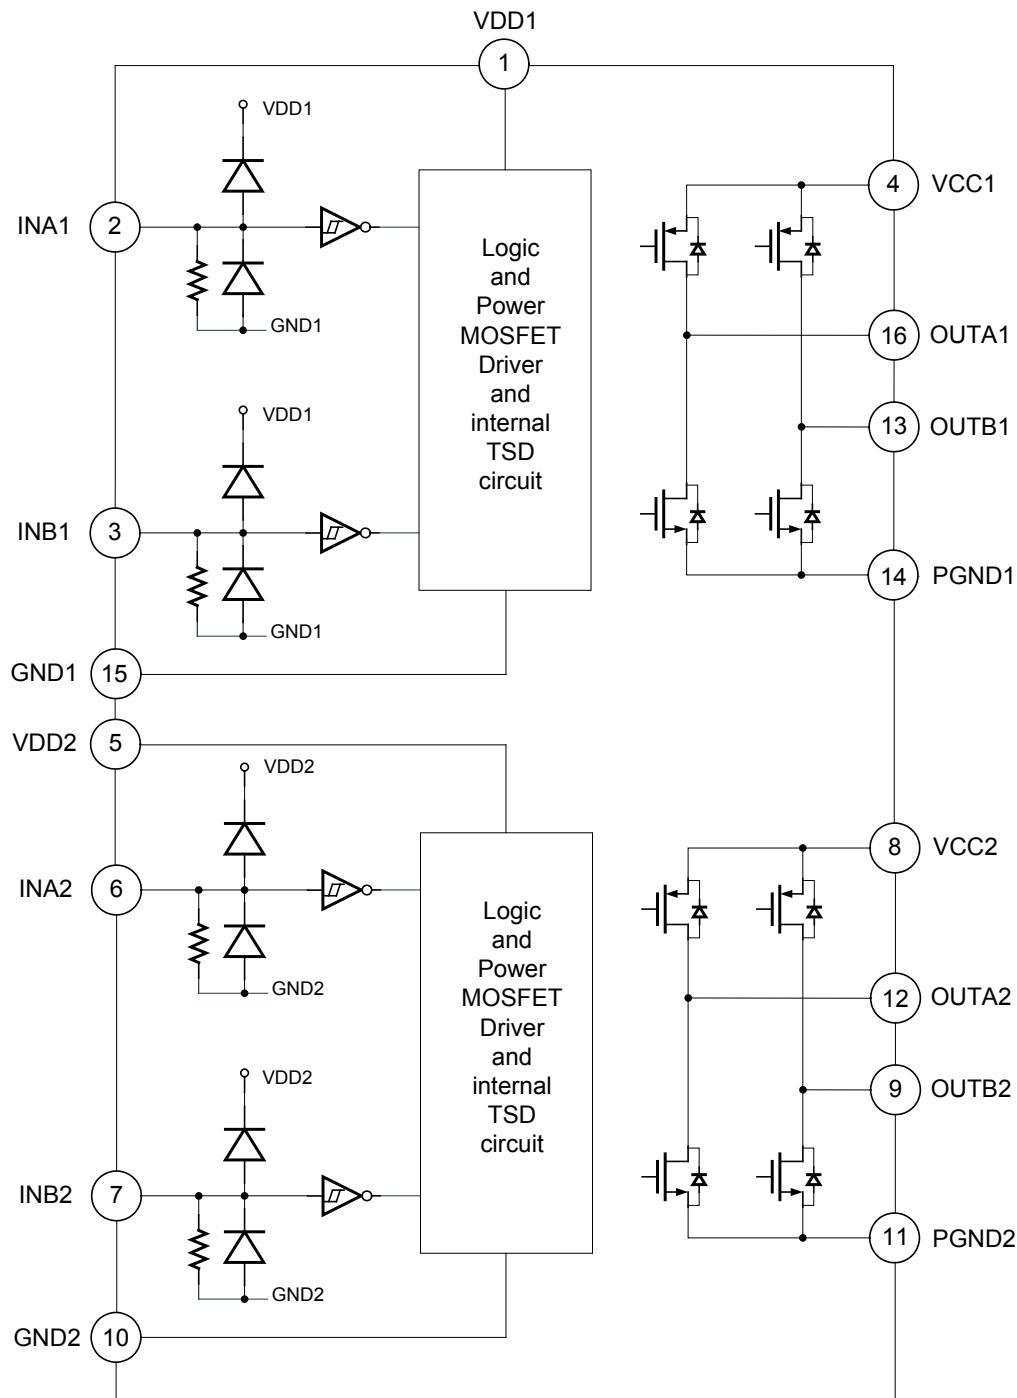

4. PIN DESCRIPTION

Pin Name	Pin No.	ATTR.	Description
INA1	2	I	Channel 1 Forward rotation logic input.
INB1	3	I	Channel 1 Backward rotation logic input.
OUTA1	16	O	Channel 1 Forward rotation output.
OUTB1	13	O	Channel 1 Backward rotation output.
VDD1	1	Power	Channel 1 Positive power of logic control circuit.
VCC1	4	Power	Channel 1 Positive power of output power MOSFET.
GND1	15	Power	Channel 1 Negative power of logic control circuit.
PGND1	14	Power	Channel 1 Negative power of output power MOSFET.
INA2	6	I	Channel 2 Forward rotation logic input.
INB2	7	I	Channel 2 Backward rotation logic input.
OUTA2	12	O	Channel 2 Forward rotation output.
OUTB2	9	O	Channel 2 Backward rotation output.
VDD2	5	Power	Channel 2 Positive power of logic control circuit.
VCC2	8	Power	Channel 2 Positive power of output power MOSFET.
GND2	10	Power	Channel 2 Negative power of logic control circuit.
PGND2	11	Power	Channel 2 Negative power of output power MOSFET.
Ex-Pad	17	Power	Exposed pad for thermal tab, must be connected to GND.

5. FUNCTION DESCRIPTION

INAx	INBx	OUTAx	OUTBx	Function
0	0	Z (Off)	Z (Off)	Stop (Standby)
1	0	1	0	Forward
0	1	0	1	Backward
1	1	0	0	Brake

'x' presents value 1 or 2.

6. ELECTRICAL CHARACTERISTICS

6.1 Absolute Maximum Rating

Symbol	Parameter		Rating	Unit
$V_{DDX} - V_{GNDX}$	Supply voltage of logic control circuit		-0.5 ~ +7.5	V
V_{CCX}	Supply voltage of output power MOSFET		10.0	V
$I_{OUT-PEAK}$	Output peak current	Channel 1	2.5	A
		Channel 2	2.5	
θ_{JA}	Thermal resistance (Junction to Ambient)	ESOP-16	45	°C/W
P_D	Power dissipation	ESOP-16	3	W
T_A	Operating ambient temperature		-40 ~ +85	°C
T_J	Operating junction temperature		+160	°C
T_{ST}	Storage temperature		-55 ~ +160	°C

'x' presents value 1 or 2.


6.2 DC Characteristics ($V_{DD}=3.0V$, $V_{CC}=6.0V$, $T_A=25^{\circ}C$, unless otherwise specified)

Symbol	Parameter		Min.	Typ.	Max.	Unit	Condition
V_{DDX}	Operating voltage (Logic)		1.8		6.8	V	
V_{CCX}	Operating voltage (MOSFET)		1.8		9.6	V	
I_{SB}	Standby current			0.1	1	uA	$INAx=INBx=0$
I_{OPx}	Operating current	$V_{DDX}=V_{CCX}=3.0V$		180		uA	$INAx=1, INBx=0$ or $INAx=0, INBx=1$ or $INAx=1, INBx=1$
		$V_{DDX}=V_{CCX}=6.0V$		260		uA	
I_{IHx}	Input high current (12kΩ pull-low resistance)			260		uA	$V_{IHx}=3.0V$
				510		uA	$V_{IHx}=6.0V$
V_{IH1}	Ch-1 input high voltage		2.0			V	
V_{IL1}	Ch-1 input low voltage				0.8	V	
V_{IH2}	Ch-2 input high voltage		2.0			V	
V_{IL2}	Ch-2 input low voltage				0.8	V	
R_{ON1}	Ch-1 output resistance			0.39		Ω	$I_{OUT}=800mA$
				0.44		Ω	$I_{OUT}=1200mA$
				0.50		Ω	$I_{OUT}=1500mA$
R_{ON2}	Ch-2 output resistance			0.39		Ω	$I_{OUT}=800mA$
				0.44		Ω	$I_{OUT}=1200mA$
				0.50		Ω	$I_{OUT}=1500mA$
I_{OUT1}	Ch-1 output continuous current (* with PCB heat dissipation)			1500	1800*	mA	ESOP-16
I_{OUT2}	Ch-2 output continuous current (* with PCB heat dissipation)			1500	1800*	mA	


Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I _{PULSE1}	Ch-1 pulsed drain current			6.0	A	Pulse width < 20ms
I _{PULSE2}	Ch-2 pulsed drain current			6.0	A	Pulse width < 20ms
T _{RISE1}	Ch-1 output rise time		310		ns	PWM=20kHz, Duty=50%
T _{FALL1}	Ch-1 output fall time		125		ns	
T _{RP1}	Ch-1 Input-to-Output response time		420		ns	
T _{RISE2}	Ch-2 output rise time		310		ns	
T _{FALL2}	Ch-2 output fall time		125		ns	PWM=20kHz, Duty=50%
T _{RP2}	Ch-2 Input-to-Output response time		420		ns	
T _{TSD}	Thermal shutdown (TSD)		160		°C	
T _{TSDH}	Thermal shutdown hysteresis		40		°C	Junction temperature

'x' presents value 1 or 2.

7. APPLICATION CIRCUIT

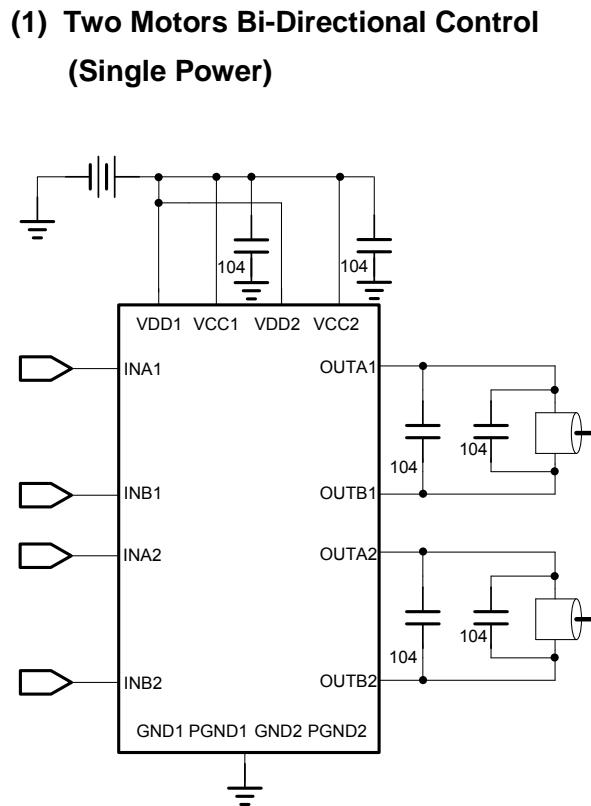

(2) Two Motors Bi-Directional Control (Dual Power)

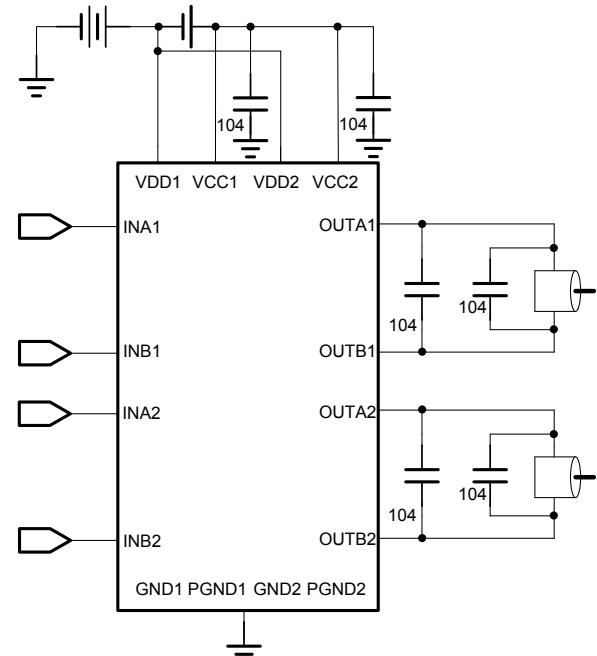

8. PACKAGE DIMENSION

16-Pin Plastic ESOP with Exposed Pad (150 mil)

Note: For 16-pin SOP IC, 50 units per tube.

	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.236 BSC			6.00 BSC		
B	0.154 BSC			3.90 BSC		
C	0.012	-	0.020	0.31	-	0.51
C'	0.390 BSC			9.90 BSC		
D	0.065	-	0.069	1.64	-	1.75
E	0.050 BSC			1.27 BSC		
F	0.004	-	0.010	0.10	-	0.25
G	0.016	-	0.050	0.40	-	1.27
H	0.004	-	0.010	0.10	-	0.25
α	-	-	8°	-	-	8°
C1'	0.093	-	0.110	2.37	-	2.79
B1	0.077	-	0.090	1.95	-	2.28

9. ORDERING INFORMATION

P/N	Package Type	Package Width	Shipping
HM2538	ESOP-16	150 mil.	<u>Tape & Reel</u> : 2.5K pcs per Reel <u>Tube</u> : 50 pcs per Tube