

# HMC10N120D

## Silicon Carbide Schottky Diode

$V_{RRM}$	=	1200	V
$I_F (T_C \leq 135^\circ\text{C})$	=	15	A
$Q_C$	=	29	nC

### Features

- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on  $V_F$
- Temperature-independent Switching
- 175°C Operating Junction Temperature


### Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

### Applications

- Switch Mode Power Supplies
- Power Factor Correction
- AC/DC converters

### Package



TO-263-2



Part Number	Package	Marking
HMC10N120D	TO-263-2	HMC10N120D

### Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{RRM}$	Repetitive Peak Reverse Voltage	1200	V	$T_C = 25^\circ\text{C}$	
$V_{RSM}$	Surge Peak Reverse Voltage	1200	V	$T_C = 25^\circ\text{C}$	
$V_R$	DC Blocking Voltage	1200	V	$T_C = 25^\circ\text{C}$	
$I_F$	Forward Current	30 15 10	A	$T_C \leq 25^\circ\text{C}$ $T_C \leq 135^\circ\text{C}$ $T_C \leq 154^\circ\text{C}$	
$I_{FSM}$	Non-Repetitive Forward Surge Current	100	A	$T_C = 25^\circ\text{C}$ , $t_p = 8.3\text{ms}$ , Half Sine Wave	
$P_{tot}$	Power Dissipation	158	W	$T_C = 25^\circ\text{C}$	Fig.3
$T_C$	Maximum Case Temperature	154	$^\circ\text{C}$		
$T_J, T_{STG}$	Operating Junction and Storage Temperature	-55 to 175	$^\circ\text{C}$		

## Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$V_F$	Forward Voltage	1.55 2.2	1.8 2.5	V	$I_F = 10A, T_J = 25^{\circ}C$ $I_F = 10A, T_J = 175^{\circ}C$	Fig.1
$I_R$	Reverse Current	2 10	20 200	$\mu A$	$V_R = 1200V, T_J = 25^{\circ}C$ $V_R = 1200V, T_J = 175^{\circ}C$	Fig.2
C	Total Capacitance	650 49 40	/	pF	$V_R = 0V, T_J = 25^{\circ}C, f = 1MHz$ $V_R = 400V, T_J = 25^{\circ}C, f = 1MHz$ $V_R = 800V, T_J = 25^{\circ}C, f = 1MHz$	Fig.5
$Q_C$	Total Capacitive Charge	29	/	nC	$V_R = 800V, I_F = 10A$ $di/dt = 200A/\mu s, T_J = 25^{\circ}C$	Fig.4

## Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.95	$^{\circ}C/W$	Fig.6
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	80	$^{\circ}C/W$	
$T_{sold}$	Soldering Temperature	260	$^{\circ}C$	

## Typical Performance

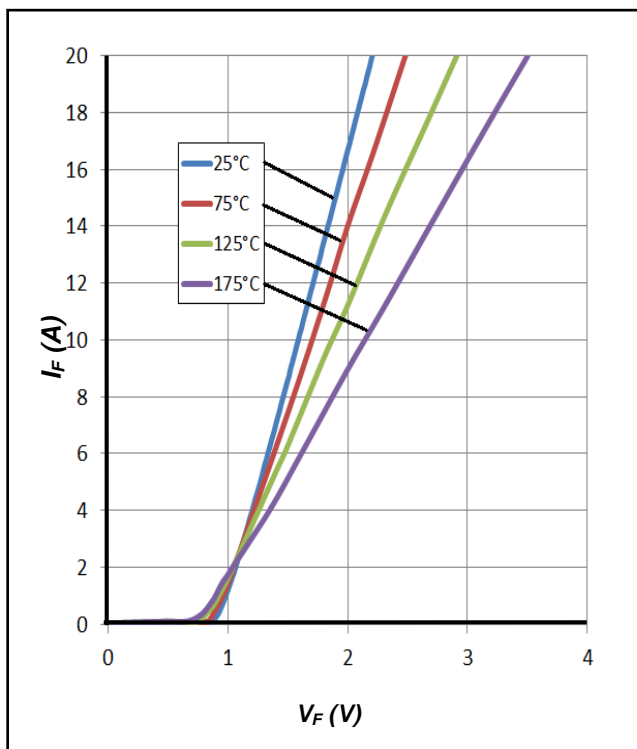


Figure 1. Forward Characteristics

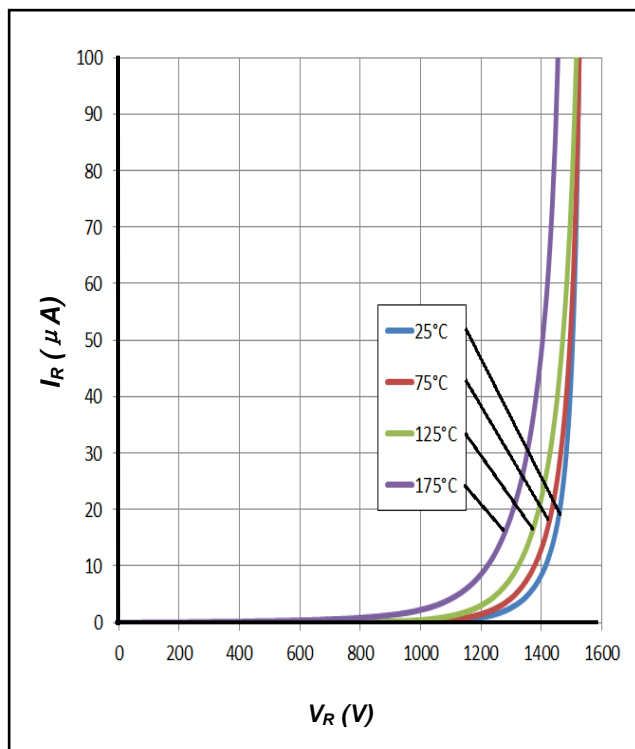


Figure 2. Reverse Characteristics

## Typical Performance

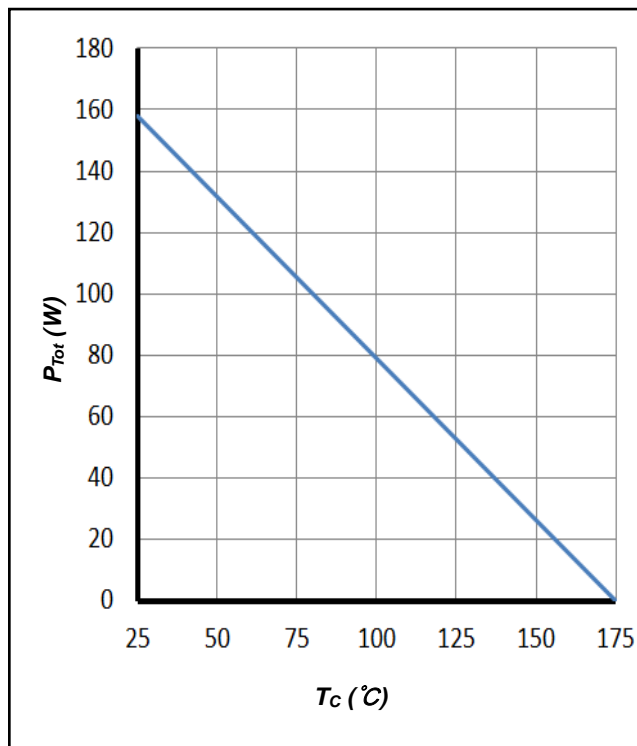


Figure 3. Power Derating

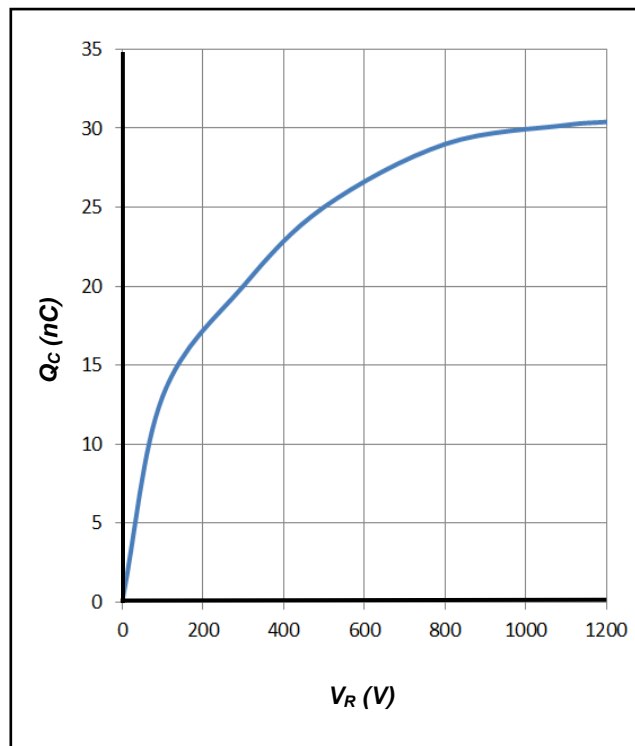


Figure 4. Total Capacitive Charge vs. Reverse Voltage

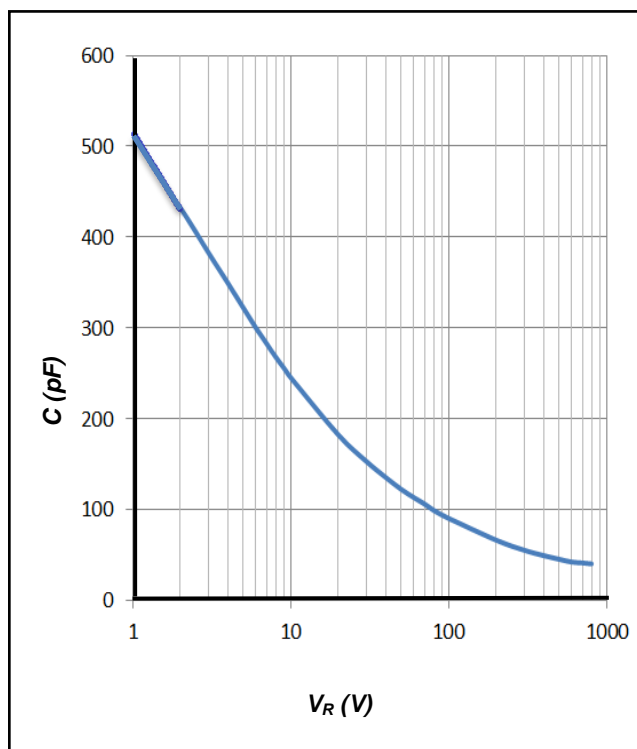


Figure 5. Total Capacitance vs. Reverse Voltage


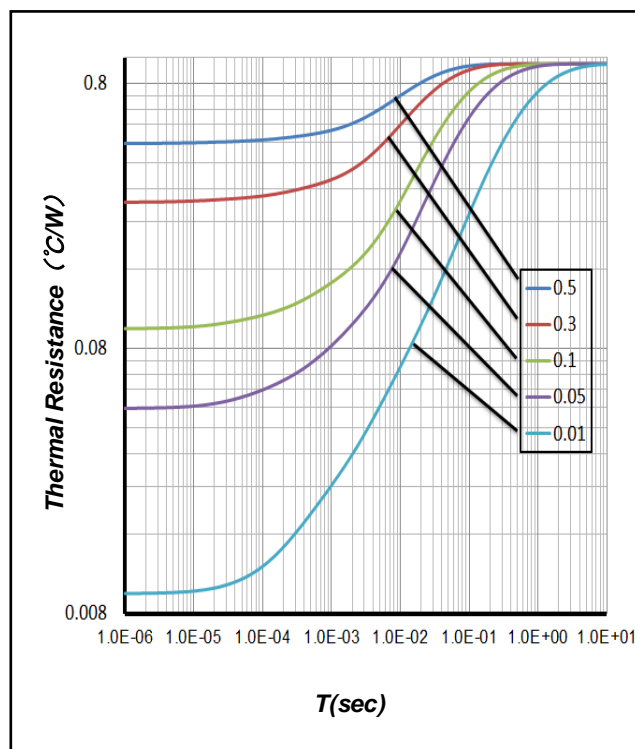


Figure 6. Transient Thermal Impedance

## Package Dimensions


Package TO-263-2

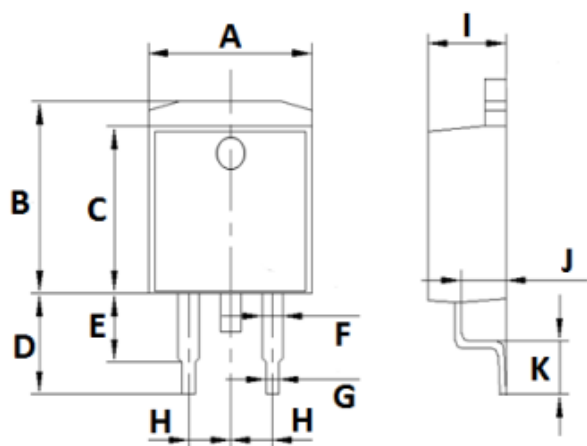

Symbol	Min. (mm)	Typ. (mm)	Max. (mm)
A	9.9	10.1	10.3
B	9.90	10.1	10.3
C	8.50	8.7	8.90
D	4.85	5.05	5.25
E	3.00	3.2	3.40
F	1.05	1.25	1.45
G	0.60	0.8	1.00
H	2.34	2.54	2.74
I	4.40	4.6	4.80
J	2.40	2.6	2.80
K	2.55	1.75	2.95

## Simplified Diode Model

Equivalent IV Curve for Model

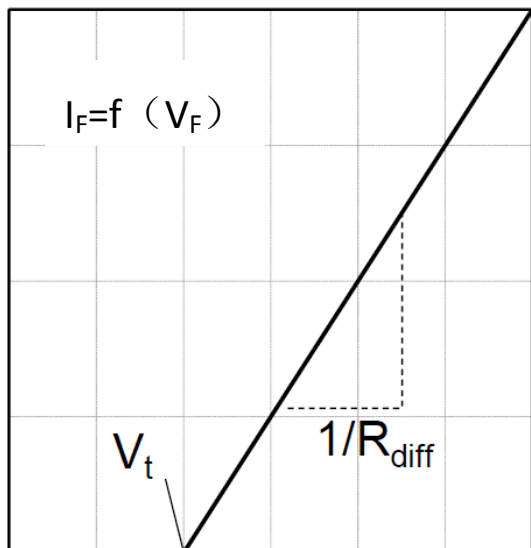

Mathematical Equation

$$V_F = V_t + I_F \times R_{diff}$$

$$V_t = -0.0012 \times T_j + 0.995 \text{ [V]}$$

$$R_{diff} = 2.12 \times 10^{-6} \times T_j^2 + 1.06 \times 10^{-4} \times T_j + 0.058 \text{ [\Omega]}$$

Note:

$T_j$  = Diode Junction Temperature In Degrees Celsius,  
valid from 25°C to 175°C

$I_F$  = Forward Current

Less than 20A