

## Description


The HM100P35KE uses advanced trench technology to provide excellent  $R_{DS(ON)}$ . This device is suitable for use as a load switch or power management.

## General Features


- $V_{DS} = -35V, I_D = -100A$   
 $R_{DS(ON)} < 7.2m\Omega @ V_{GS} = -10V$
- High power and current handling capability
- Lead free product is acquired
- Surface mount package

## Application


- Power management
- Load switch



Schematic diagram



Marking and pin assignment



TO-252-2L top view

## Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
HM100P35KE	HM100P35KE	TO-252-2L	Ø330mm	12mm	2500 units

## Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	-35	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current-Continuous	$I_D$	-100	A
Drain Current-Pulsed (Note 1)	$I_{DM}$	-300	A
Maximum Power Dissipation	$P_D$	75	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 To 150	$^\circ\text{C}$

## Thermal Characteristic

Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta JA}$	36	$^\circ\text{C/W}$
--	-----------------	----	--------------------

## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-35	-33	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = -35V, V_{GS} = 0V$	-	-	-1	$\mu A$

Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±20V,V <sub>DS</sub> =0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> ,I <sub>D</sub> =-250μA	-1.0	-	-3.0	V
Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =-10V, I <sub>D</sub> =-30A	-	5.5	7.2	mΩ
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =-10V,I <sub>D</sub> =-30A	30	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> =-15V,V <sub>GS</sub> =0V, F=1.0MHz	-	3960	-	PF
Output Capacitance	C <sub>OSS</sub>		-	486	-	PF
Reverse Transfer Capacitance	C <sub>RSS</sub>		-	268	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =-15V, ID=-20A, V <sub>GS</sub> =-10V,R <sub>GEN</sub> =3Ω	-	20	-	nS
Turn-on Rise Time	t <sub>r</sub>		-	13	-	nS
Turn-Off Delay Time	t <sub>d(off)</sub>		-	55	-	nS
Turn-Off Fall Time	t <sub>f</sub>		-	21	-	nS
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =-15V,I <sub>D</sub> =-20A,V <sub>GS</sub> =-10V	-	65	-	nC
Gate-Source Charge	Q <sub>gs</sub>		-	12	-	nC
Gate-Drain Charge	Q <sub>gd</sub>		-	14	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V <sub>SD</sub>	V <sub>GS</sub> =0V,I <sub>S</sub> =-50A	-	-	-1.2	V

## Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board,  $t \leq 10$  sec.
3. Pulse Test: Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$ .
4. Guaranteed by design, not subject to production

## Typical Electrical and Thermal Characteristics



Figure 1 Switching Test Circuit

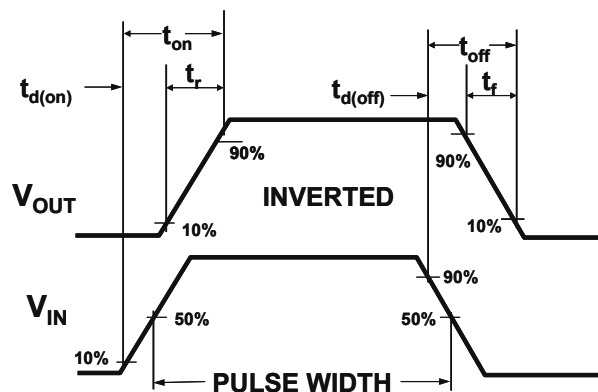


Figure 2 Switching Waveforms

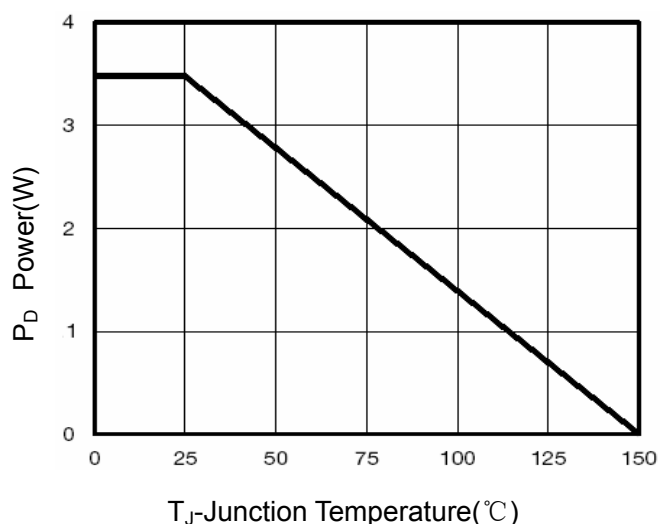


Figure 3 Power Dissipation

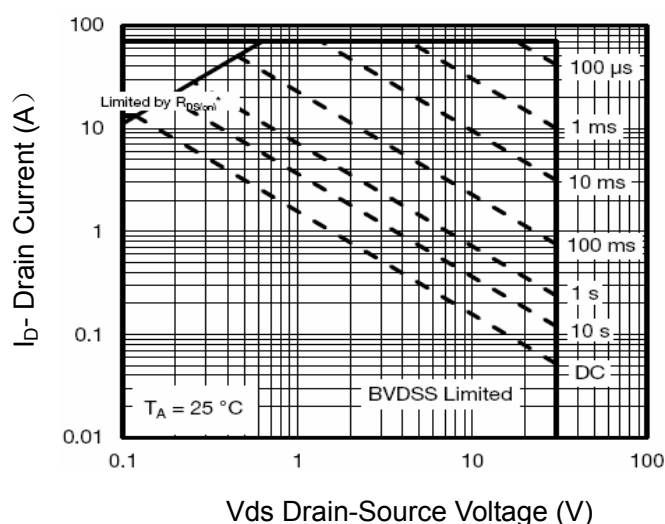


Figure 4 Safe Operation Area

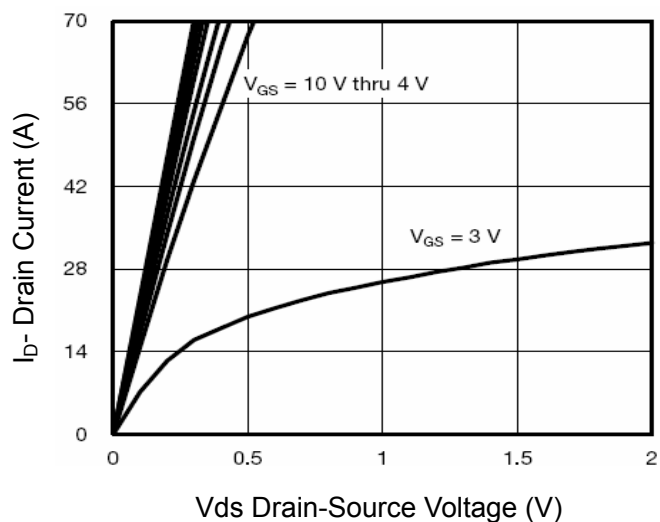


Figure 5 Output Characteristics



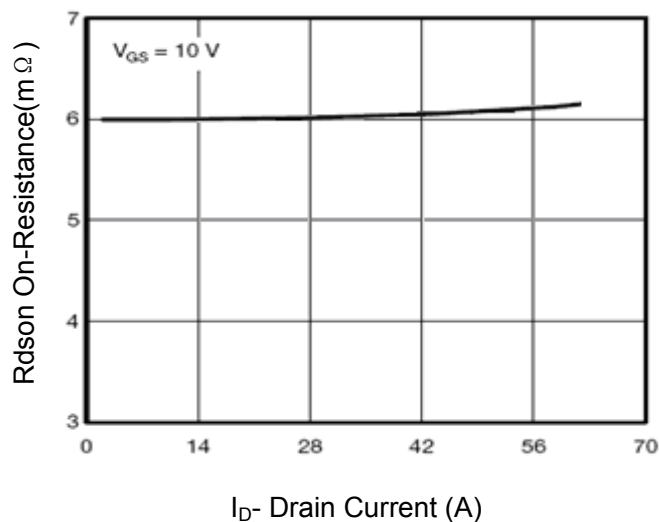



Figure 6 Drain-Source On-Resistance

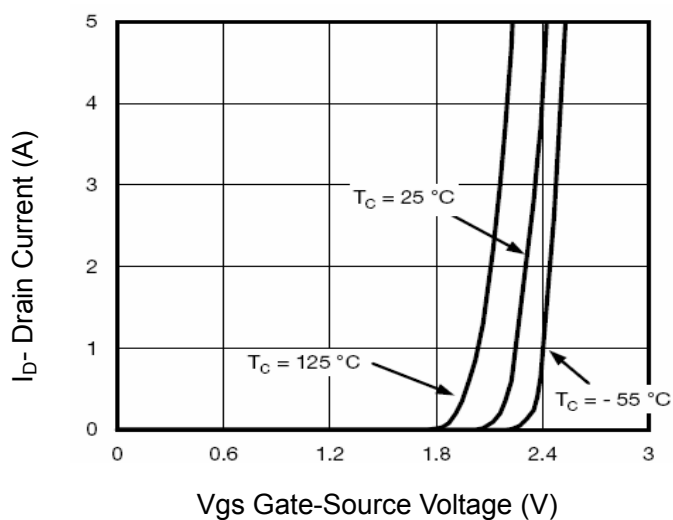


**Figure 7 Transfer Characteristics**

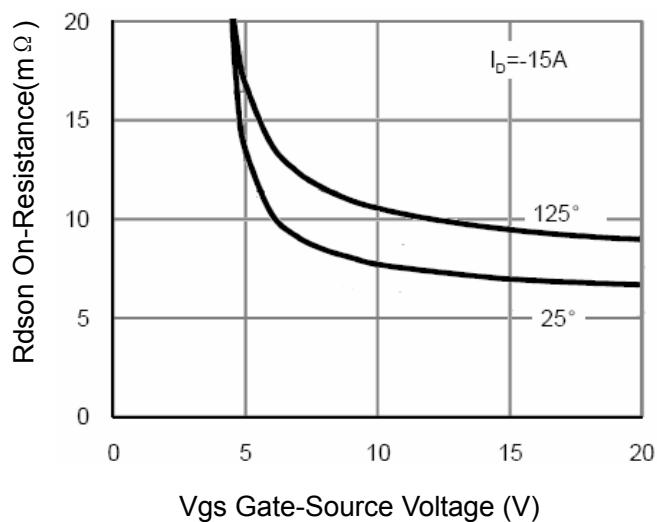


**Figure 9 Rdson vs Vgs**

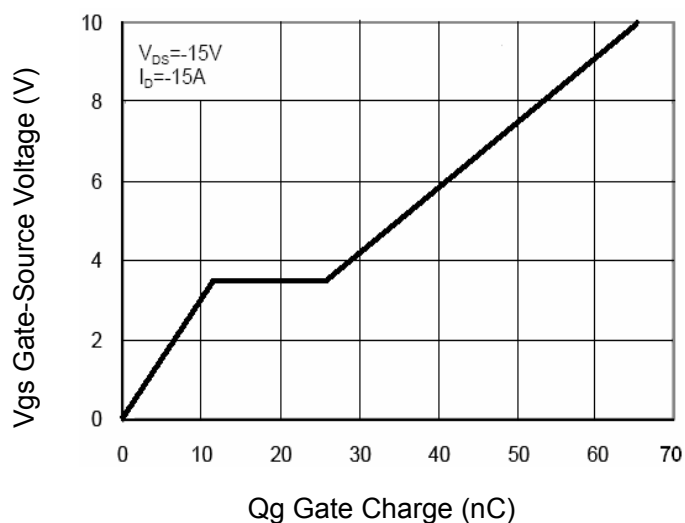


**Figure 11 Gate Charge**

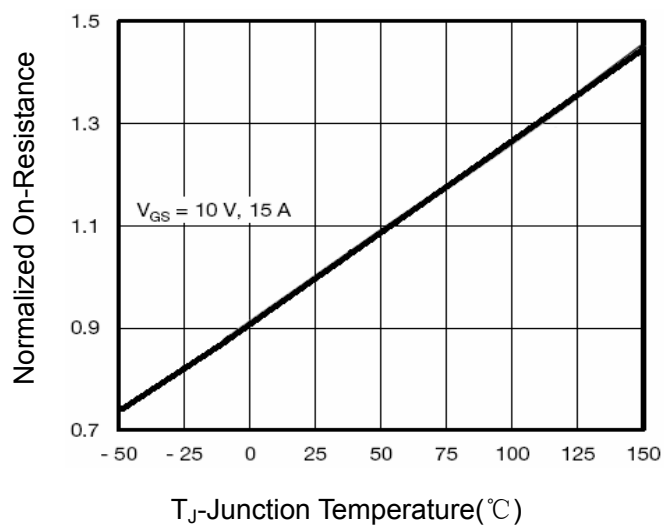


**Figure 8 Drain-Source On-Resistance**

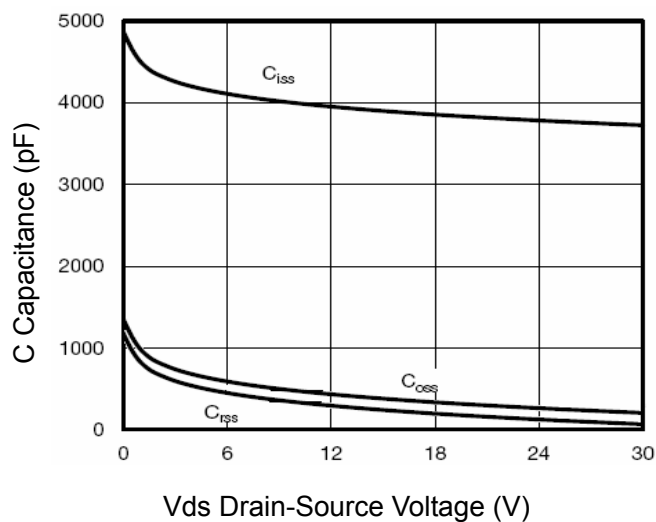

**Figure 10 Capacitance vs Vds**

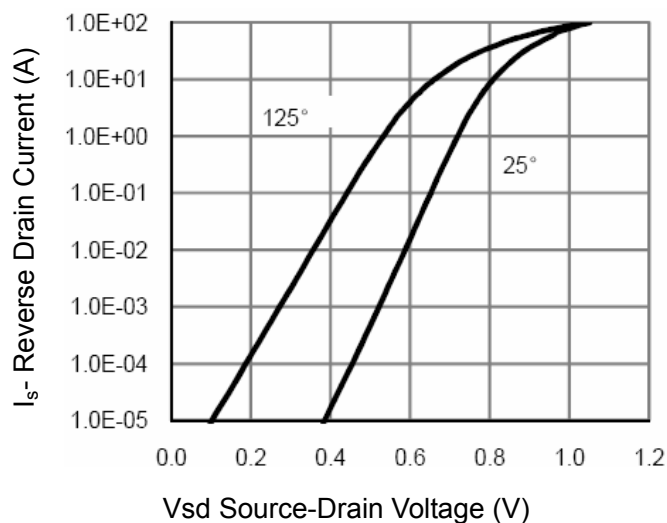


**Figure 12 Source- Drain Diode Forward**

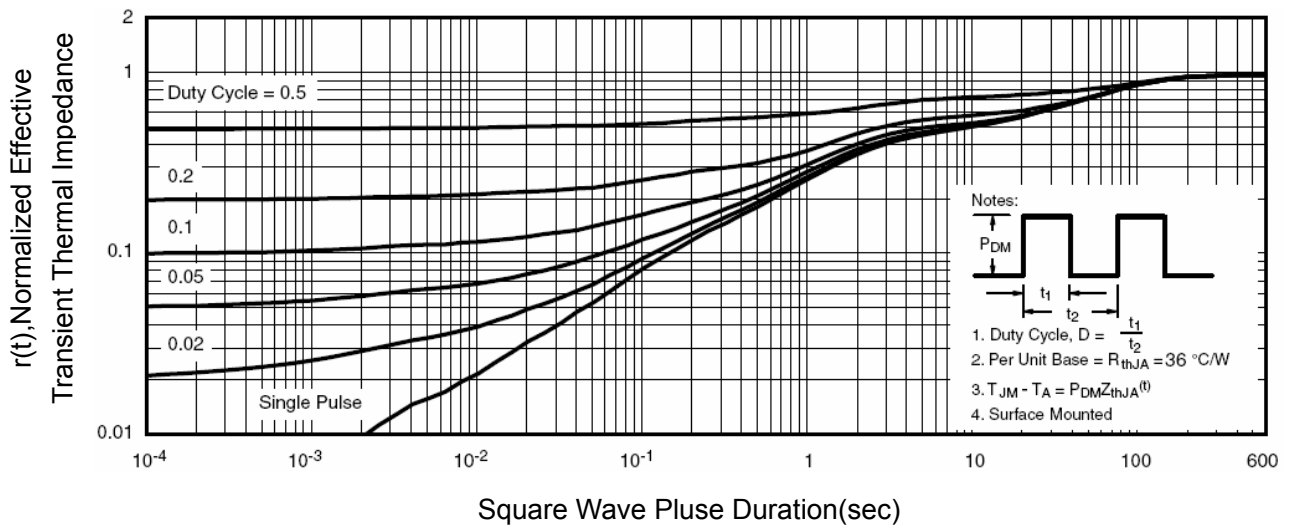

**Figure 13 Normalized Maximum Transient Thermal Impedance**

**TO-252-2L PACKAGE OUTLINE DIMENSIONS**

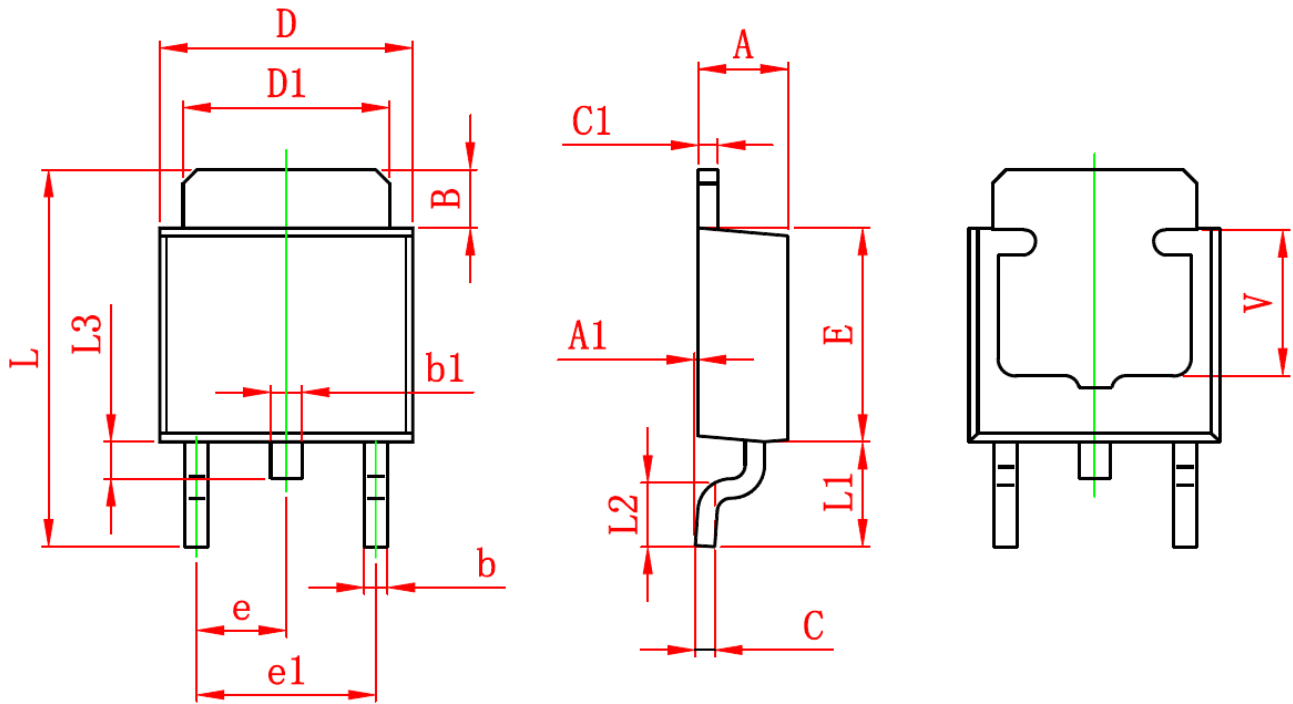

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
L3	0.600	0.900	0.024	0.035
V	3.800 REF.		0.150 REF.	